



Furlong Flooring®
First choice flooring for every room

Woodland Supreme

Product Specification

Manufactured by Regency Carpets in the UK

CONSTRUCTION	SPECIFICATION	STANDARD
Pile	Tufted, cut pile	
Yarn	100% PP	
Machine Gauge	1/10 Gauge	
Width	4 & 5 Mtrs	
Tufts Density	183727 tufts/ m ²	BS ISO 1763:2020
Total Weight	2540grms	BS ISO 8543:2020
Inserted Weight	1700grms	BS ISO 8543:2020
Pile Height	9mm (±10%)	BS ISO 1766:1999
Total Thickness	11.5mm (±10%)	BS ISO 1765:1986
Standard Roll Length	25 linear metres	
Type of Backing	Combi-Bac®	
Classification	Class 23 - Heavy Domestic Class 32 - General Commercial	BS EN 1307:2014
	Luxury Class 5	BS EN 1307:2014
Thermal Resistance	1.30 TOG /0.130 m ² K/W	BS 4745:2005 (ISO 5085-1:1989)
Hot Metal Nut Test	High Radius of Char	BS 4790:1987 (2014)
Flammability	Efl S1	BS 13501-1:2007
Colour Fastness to Light	4/5	BS ISO 105-X12
WARRANTY		
Wear	10 years	
Stain	Bleach Cleanable	
Biological	Moth / Insect proof	
Made in the UK		
CE Compliant		EN14041:2004
ISO certifications		ISO 9001 / ISO 14001 / ISO 45001



Tailored
TWIST





Furlong Flooring®
First choice flooring for every room


Woodland Supreme

Product Specification

Manufactured by Regency Carpets in the UK

Our Regency Woodland SupremeTwist range offers a perfect blend of durability, style, and affordability—making it an ideal choice for any room, even in the busiest households. High-traffic areas and the occasional spill are no problem thanks to its bleach-cleanable design and 10-year wear and stain warranty.

COLOURS	4M
Midnight Bark	2341
Frosted Canopy	2342
Silver Birch	2343
Lichen Grove	2344
Golden Bramble	2345
Pine Cone	2346
Forest Bark	2347
Ash Root	2348
Stone Hollow	2349
Twig Path	2350
Acorn Dust	2351
Frost Fern	2352
Amber Moss	2353
Oak Glade	2354

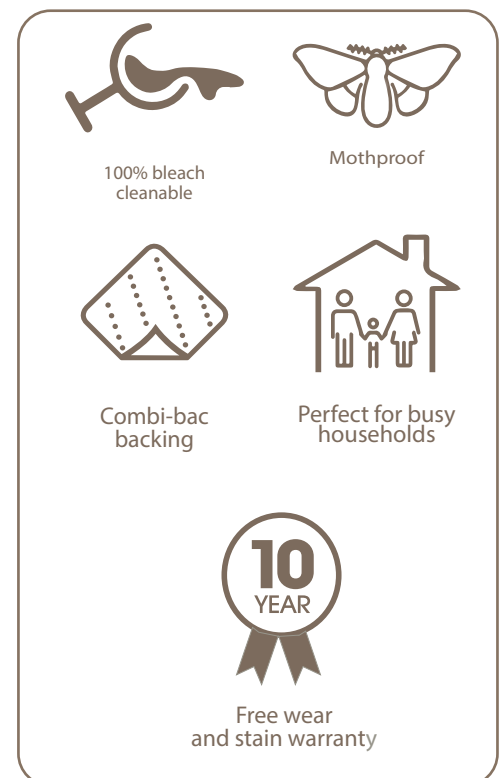

Dartford: 01322 628700

Preston: 01772 316150

Stonehouse: 01452 228400

Ireland +353-1-409200

www.furlongflooring.com
enquiries@furlongflooring.com

