



Furlong Flooring®
First choice flooring for every room

Woodland

Product Specification

Manufactured by Regency Carpets in the UK

CONSTRUCTION	SPECIFICATION	STANDARD
Pile	Tufted, cut pile	
Yarn	100% PP	
Machine Gauge	1/10 Gauge	
Width	4 & 5 Mtrs	
Tufts Density	144357 tufts/ m ²	BS ISO 1763:2020
Total Weight	2040grms	BS ISO 8543:2020
Inserted Weight	1200grms	BS ISO 8543:2020
Pile Height	7.5mm (±10%)	BS ISO 1766:1999
Total Thickness	10mm (±10%)	BS ISO 1765:1986
Standard Roll Length	25 linear metres	
Type of Backing	Combi-Bac®	
Classification	Class 23 - Heavy Domestic Class 32 - General Commercial	BS EN 1307:2014
	Luxury Class 3	BS EN 1307:2014
Thermal Resistance	1.26 TOG /0.126 m ² K/W	BS 4745:2005 (ISO 5085-1:1989)
Hot Metal Nut Test	High Radius of Char	BS 4790:1987 (2014)
Flammability	Efl S1	BS 13501-1:2007
Colour Fastness to Light	4/5	BS ISO 105-X12
WARRANTY		
Wear	10 years	
Stain	Bleach Cleanable	
Biological	Moth / Insect proof	
Made in the UK		
CE Compliant		EN14041:2004
ISO certifications		ISO 9001 / ISO 14001 / ISO 45001



Tailored
TWIST





Furlong Flooring®
First choice flooring for every room


Woodland

Product Specification

Manufactured by Regency Carpets in the UK

Our Regency Woodland Twist collection combines durability, style, and great value—making it a smart choice for every room in your home, even the busiest ones. Designed to handle heavy foot traffic and everyday mishaps, it's bleach-cleanable and backed by a 10 year wear and stain warranty.

COLOURS	4M
Midnight Bark	2441
Frosted Canopy	2442
Silver Birch	2443
Lichen Grove	2444
Golden Bramble	2445
Pine Cone	2446
Forest Bark	2447
Ash Root	2448
Stone Hollow	2449
Twig Path	2450
Acorn Dust	2451
Frost Fern	2452
Amber Moss	2453
Oak Glade	2454

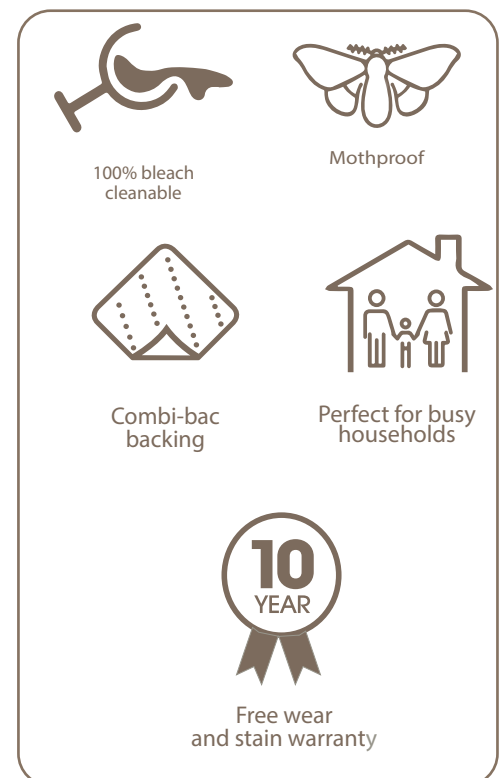

Dartford: 01322 628700

Preston: 01772 316150

Stonehouse: 01452 228400

Ireland +353-1-409200

www.furlongflooring.com
enquiries@furlongflooring.com

